


NEW

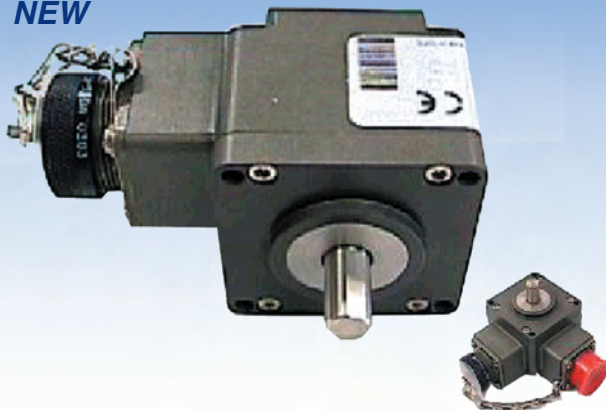

Series HD20

- **Single or Dual output**
- **ATEX Certification available for Intrinsically Safe application**
- **High Resolution Unbreakable Disk**
- **Industrial Duty Connector**
- **NEMA 4X / IP67 Rated**
- **Nickel or Stainless Steel Housing available**
- **Two Year Warranty**

Harsh-Duty Optical Encoder

DESCRIPTION

The HD20 Harsh-Duty Optical Encoder is a compact heavy-duty encoder designed to exceed IP66/IP67 and NEMA 6 enclosure requirements. It is also available in stainless steel that exceeds NEMA 4X and NEMA 6P requirements and is ideal for stringent wash down environments, including those where high pressure steam or caustic chemicals are needed to meet regulatory requirements.

The HD20 features 100 lb Axial and Radial Bearings, -40° to +100°C temperature range and unique labyrinth double-sealed housing, and optional dual “redundant” outputs and is covered by a two-year warranty (one year for bearings). NorthStar’s traditional quality, reliability and value are built-in to every HD20 encoder.

Also available in this series, is an Intrinsically Safe version certified to ATEX EEx ia IIB T4 when used with the appropriate IS Barrier. Accessory barriers can be supplied with the encoder.

APPLICATIONS:

The HD20 Harsh-Duty Optical Encoder is ideal for machine applications with corrosive environments that demand heavy washdown protection. This compact, special-duty encoder is designed to exceed IP66/IP67 and NEMA 6 enclosure requirements with a PPR range through 3600. ATEX certification is also available for intrinsically safe applications.

- Converting Machinery
- Material Handling
- Packaging Equipment
- Pickling Equipment
- Processing Equipment

INDUSTRIES

Chemical, Food & Beverage, Oil & Gas, Paper, Steel and any other where a precise encoder is needed to operate in harsh environments.

FEATURES/BENEFITS

Mechanical and Environmental

- Unbreakable code disk
- Flexible mounting
- Heavy duty shaft seals
- Sealed connector

Electrical

- Cast housing maximizes noise immunity and durability

Harsh-Duty Optical Encoder

Series HD20

Harsh-Duty Optical Encoder... Meets Stringent Washdown Requirements

SPECIFICATIONS*


STANDARD OPERATING CHARACTERISTICS

Code: Incremental
Resolution: 1 to 3600 PPR (pulses/revolution)
Format: Two channel quadrature (AB) with optional Index (Z), and complementary outputs
Phase Sense: A leads B for CCW shaft rotation viewing the shaft clamp end of the encoder
Quadrature Phasing: For resolutions to 625PPR: 90° ± 15° electrical; For resolutions over 625 PPR: 90° ± 30° electrical of 1000 pf
Symmetry:
 For resolutions to 1024PPR: 180° ± 18° electrical
 For resolutions over 1024PPR: 180° ± 25° electrical
Waveforms: Squarewave with rise and fall times less than 1 microsecond into a load capacitance of 1000 pf

ELECTRICAL

Input Power: 5-26VDC; 50 mA max., not including output loads. ATEX: 5VDC, 7-26VDC
Outputs: 2N2222, ET7272, ET7273
Frequency Response: 125 kHz (data & index)
Termination: 6, 7, or 10 pin MS Connector; 18" cable exit w/seal
Mating Connector:
 6 pin, style MS3106A-14S-6S (MCN-N4);
 7 pin, style MS3106A-16S-1S (MCN-N5);
 10 pin, style MS3106A-18-1S (MCN-N6)

DATA AND INDEX
 Not all complements shown.
 A shown for reference

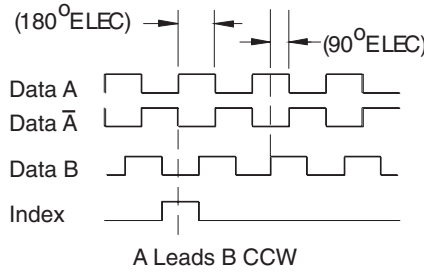

ENVIRONMENTAL

Operating Temperature: -40 to 100°C
Operating Temperature ATEX: -40 to 80°C
Storage temperature: -40 to 100°C
Shock: 50G's for 11msec duration
Vibration: 5 to 2000Hz @ 20 G's
Humidity: 100%
Enclosure Rating: Enclosure Rating: NEMA 4X, NEMA 6, IP66, IP67 (NEMA 6P upon request)
 Note: "MS" type mating connectors and prebuilt cables are rated NEMA 12. "M12" Cable assemblies are rated IP67

MECHANICAL

Shaft Material: 303 stainless steel (passivated)
Shaft speed: 6000 RPM, maximum
Shaft loading: Up to 100 lbs axial and radial
Shaft runout: 0.0005 TIR at midpoint
Starting torque: 2.5 in-oz. maximum (at 25°C)
Bearings: 5200 ZZ double row
Bearing life: 5 x 10⁸ revs at rated shaft loading, 5 x 10¹¹ revs at 10% of rated shaft loading. (manufacturers' specs)
Housing and cover: Hard Anodized Aluminum. Also available in Electroless Nickel finish and Stainless Steel.
Disc material: Metal or mylar
Weight: 14 ounces, typical

* Specifications are for base models with standard features only unless otherwise noted. Specifications subject to change without notice in accordance with our DBS policy of continuous improvement. All product and brand names are trademarks of their respective owners. All rights reserved.

ELECTRICAL CONNECTIONS

6, 7 & 10 Pin MS Connectors and Cables

Connector & mate/accessory cable assembly pin numbers and wire color information is provided here for reference. HD20 models with direct cable exit carry the color coding as shown in the right hand column.

| Encoder Function | Cable # 108594-6 Pin Single Ended | | Cable # 108595-7 Pin Single Ended | | Cable # 108596-7 Pin Dif Line Drv w/o Idx | | Cable # 1400635-10 Pin Dif Line Drv w/ Idx | | Cable Exit with Seal |
|------------------|-----------------------------------|------------|-----------------------------------|------------|---|------------|--|------------|----------------------|
| | Pin | Wire Color | Pin | Wire Color | Pin | Wire Color | Pin | Wire Color | Wire Color |
| Sig. A | E | BRN | A | BRN | A | BRN | A | BRN | GREEN |
| Sig. B | D | ORG | B | ORG | B | ORG | B | ORG | BLUE |
| Sig. Z | C | YEL | C | YEL | — | — | C | YEL | ORANGE |
| Power +V | B | RED | D | RED | D | RED | D | RED | RED |
| Com | A | BLK | F | BLK | F | BLK | F | BLK | BLACK |
| Case | — | — | G | GRN | G | GRN | G | GRN | WHITE |
| N/C | F | — | E | — | — | — | E | — | — |
| SigA | — | — | — | — | C | BRN/WHT | H | BRN/WHT | VIOLET |
| SigB | — | — | — | — | E | ORG/WHT | I | ORG/WHT | BROWN |
| SigZ | — | — | — | — | — | — | J | YEL/WHT | YELLOW |


Note: "MS" type mating connectors and prebuilt cables are rated NEMA 12. "M12" Cable assemblies are rated IP67




Customer Service +1 800.873.8731 • Technical Support +1 800.234.8731
www.dynapar.com

Harsh-Duty Optical Encoder... Meets Stringent Washdown Requirements


DIMENSIONS inches [mm]

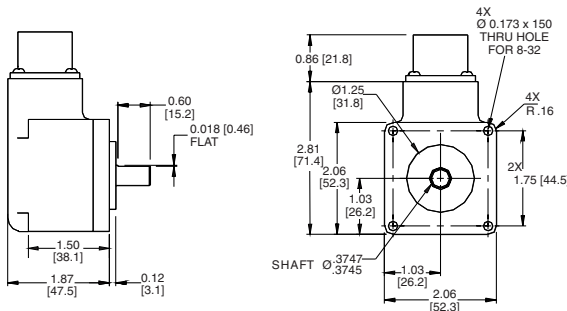

Standard Housing



Dual Redundant Outputs

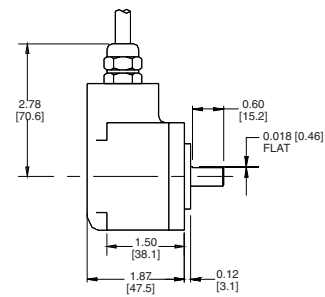

Cable Exit

ORDERING INFORMATION

| Code 1: Model | Code 2: PPR | Code 3: Shaft | Code 4: Electrical | Code 5: Termination | Code 6: Options |
|---------------|-------------|---------------|--------------------|---------------------|-----------------|
| HD20 □ | □□□□ | □ | □ | □ | □ |

Ordering Information

| | | | | | |
|--|--|--|--|--|--|
| <p>Size 20 Extreme Heavy Duty Encoder</p> <p>1 Unidirectional 2 Bidirectional 3 Bidirectional with Index</p> | <p>0001 0500 0010 0512 0024 0600 0025 0625 0035 0720 0040 1000 0060 1024 0100 1200 0120 1250 0192 1440 0200 2000 0240 2048 0250 2500 0256 2540 0300 2600 0360 3600</p> | <p>0 3/8" Dia. Shaft with flat</p> <p>4 10mm Dia. Shaft, no flat</p> | <p>0 5-26V in, 5-26V Open Collector out (7273)</p> <p>2 5-26V in, 5-26V Push-Pull out</p> <p>F 5-26V in, 5-26V Open Collector out (2222)</p> <p>G 5-26V in, 5-26V Open Collector out with 2.2 kΩ Pullups (2222)</p> <p>available when: Code 1 is 1,2 and Code 5 is 3 through H, or Code 1 is 3 and Code 5 is 5 through H:</p> <p>3 5-26V in, 5-26V Differential Line Driver out (7272)</p> <p>4 5-26V in, 5V Differential Line Driver out (7272)</p> | <p>1 6 Pin Connector 3 7 Pin Connector 5 10 Pin Connector D 18" Sealed Cable E 3' Sealed Cable F 6' Sealed Cable G 10' Sealed Cable H 15' Sealed Cable</p> | <p>0 No Options 1 Nickel Finish Housing 2 Stainless Steel Housing A Same as "0" w/ ATEX Type 1 B Same as "1" w/ ATEX Type 1 C Same as "2" w/ ATEX Type 1</p> <p>Available when Code 4 is 0, 2, 3, F or G</p> <p>G Same as "0" w/ ATEX Type 2 H Same as "1" w/ ATEX Type 2 I Same as "2" w/ ATEX Type 2</p> <p>Available when Code 4 is 4</p> <p>M Same as "0" w/ ATEX Type 3 N Same as "1" w/ ATEX Type 3 O Same as "2" w/ ATEX Type 3</p> <p>Available when Code 4 is 0, 2, F or G</p> <p>3 Redundant Outputs (Dual Connector Housing). See † NOTE 4 Nickel Finish Housing with Redundant Outputs. See † NOTE 5 Stainless Steel Housing with Redundant Outputs. See † NOTE D Same as "3" w/ ATEX Type 1. See †NOTE E Same as "4" w/ ATEX Type 1. See †NOTE F Same as "5" w/ ATEX Type 1. See †NOTE J Same as "3" w/ ATEX Type 2. See †NOTE K Same as "4" w/ ATEX Type 2. See †NOTE L Same as "5" w/ ATEX Type 2. See †NOTE P Same as "3" w/ ATEX Type 3. See †NOTE Q Same as "4" w/ ATEX Type 3. See †NOTE R Same as "5" w/ ATEX Type 3. See †NOTE</p> <p>† NOTE: Simultaneous use of redundant outputs may void ATEX certification. Consult factory for details.</p> |
|--|--|--|--|--|--|

*Note: Available ATEX Certified Options

ATEX Type 1: ATEX Certified; 5V in, 5V out only

ATEX Type 2: ATEX Certified; 7-26V in, 7-26V out

ATEX Type 3: ATEX Certified; 7-26V in, 5V out

NOTE: ATEX voltages replace those shown in Code 4.

Encoders


Worldwide Brands:

Dynapar™

Harowe™

Hengstler™

NorthStar™

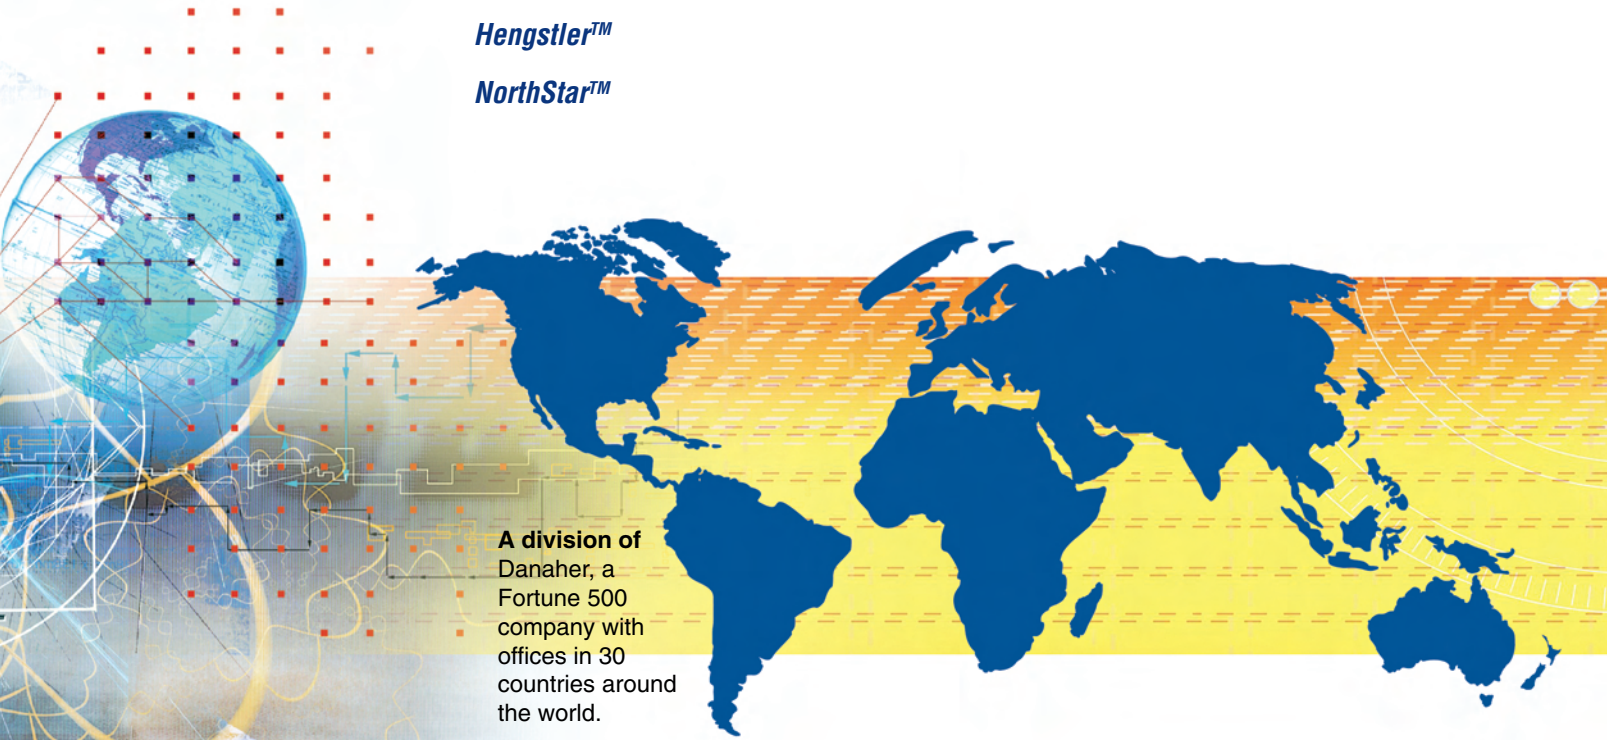

A division of Danaher, a Fortune 500 company with offices in 30 countries around the world.

More Available. With factories around the world, global sales and applications support, and an expansive network of distributors, we stay close to our customers - shortening lead times and fostering responsiveness. Three-day lead time is standard, with same-day shipments available on many of our products.

More Selection. We have a broad selection of controllers to meet application requirements in a variety of industries. User-configurable, accurate and flexible, with low, mid, or high level performance ranges, our controller products meet your system and budgetary requirements.

More Reliable. Our experience with more than 25,000 customers has taught us to design controllers that are reliable and durable, with quality standards that meet six sigma requirements.

For additional information or a full-line catalog, contact DICG Customer Service or visit our web site.

* Specifications are for base models with standard features only unless otherwise noted. Specifications subject to change without notice in accordance with our DBS policy of continuous improvement. All product and brand names are trademarks of their respective owners. All rights reserved.

NorthStar™ brand is a trademark of Dynapar. All rights reserved.

Headquarters: 1675 Delany Road • Gurnee, IL 60031-1282 • USA
Phone: +1 847.662.2666 • Fax: +1 847.662.6633

HD20 Data Sheet (03/09) ©2009 Dynapar

Document Number: 702745-0001, Rev-

Satellite Locations:

North America: North Carolina, South Carolina, Connecticut, Massachusetts, New York, Canada, British Virgin Islands • Europe: United Kingdom, Italy, France, Germany, Spain, Slovakia • Latin America: Brazil • Asia: China, Japan, Korea, Singapore

www.dynapar.com

Customer Service:

Tel.: +1.800.873.8731

Fax: +1.847.662.4150

northstar.custserv@dancon.com

Technical Support

Tel.: +1.800.234.8731

Fax: +1.847.782.5277

northstar.techsupport@dancon.com



Factory Automation Worldwide Brands: Dynapar™ • Harowe™ • Hengstler™ • NorthStar™